

22

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

(43) International Publication Date
17 March 2005 (17.03.2005)


PCT

(10) International Publication Number
WO 2005/023082 A2

- (51) International Patent Classification⁷: A61B (74) Agent: MILLER - SIERADZKI ADVOCATES & PATENT ATTORNEYS; P.O.Box 6145, 31061 Haifa (IL).
- (21) International Application Number: PCT/IL2004/000819
- (22) International Filing Date: 9 September 2004 (09.09.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/500,990 9 September 2003 (09.09.2003) US
- (71) Applicant (for all designated States except US): IMAGE IN LTD. [IL/IL]; P.O.Box 15054, 31905 Haifa (IL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): REFAEL, Moshe [IL/IL]; 83 Eitanim st., 36001 Nofit (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: ENDOSCOPE

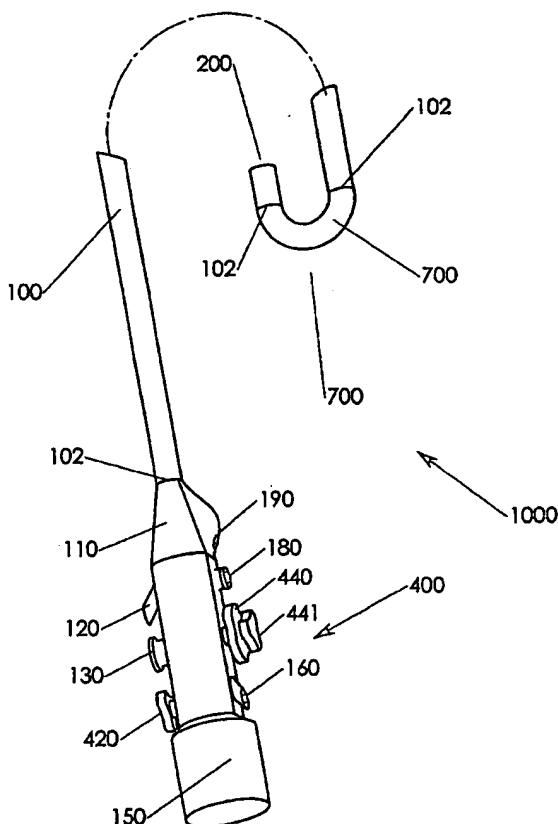

(57) Abstract: An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope comprising: flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and a stiffening mechanism for hardening at least a portion of the body, so as to allow hardening of said at least a portion of the body during navigation of the endoscope within the body lumen.

BEST AVAILABLE COPY

WO 2005/023082 A2



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guide-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

Published:

- *without international search report and to be republished
upon receipt of that report*

ENDOSCOPE

FIELD OF THE INVENTION

The invention relates to an intra-corpus imaging instrument.

5 BACKGROUND TO THE INVENTION

Endoscopes are used for a variety of examinations and treatments in lumens in the body. For example, colonoscopes and gastroscopes for the digestive system, bronchoscopes for the respiratory system, etc.

10 Endoscope units often comprise two parts: an inserted part, which penetrates into the body lumen, and a handle, which is used by the doctor to hold and control the unit.

The inserted part comprises a long, flexible trunk coming out of the handle, followed by gimbals topped by the head. The gimbals enable the head to turn in any direction for steering the unit. The head comprises a vision
15 system as well as various ingresses and egresses for operating the unit and for operating various medical systems via the unit. For example, the head can include lenses for viewing, light sources for illuminating the field of view, and apertures for delivering various materials and instruments, such as liquids to clean the lens, liquids to distend the lumen, fluoroscopes, sampling devices,
20 and therapeutic devices. The inserted part comprises several thin canals leading to the apertures, as well as a connection to the lenses and a power connection for the light sources. The connection to the lenses can comprise a fiber optic cable to carry the image or, if the lens is provided with CCD circuitry to convert the image to data, a data link.

25 The unit also houses steering cords connected to controls on the handle that enable a user to steer the endoscope by retracting or extending the cords. The steering cords run to the head of the endoscope, where the

gimbals enables the head to be steered in any direction, thereby enabling the doctor to steer the unit.

Insertion and retraction of the unit is usually done manually by the doctor who physically pushes the trunk into the body lumen, steering by means of the handle.

Ancillary equipment connected to the proximal end of the endoscope unit are collectively referred to as a workstation and can include:

1. Water pump system.
2. Compressor for air pressure.
- 10 3. Electrical power supply for light.
4. Image processing unit.
5. Vacuum pump.

The ancillary equipment connects to the endoscope via tubes and cables. Therefore an improved endoscope can be connected to an existing workstation by use of an adaptor that interfaces between the workstation connections and the endoscope connections.

Existing endoscopes are built for repeated use and therefore must be cleaned and disinfected between uses. This is an expensive time-consuming task. As a corollary, to ensure that a clean endoscope is available at all times, a stock of endoscopes must be maintained, since at any given time some of the endoscopes may not be ready for reuse. It would be preferable to provide a disposable, sterile endoscope. Existing endoscopes are too expensive to be disposable.

Existing endoscopes also have a high amortization rate caused by bending that breaks interior parts of the endoscope, by chemicals used in the cleaning of the system that attack the lenses, and by liquids that eventually infiltrate the electronic components of the device. Endoscope repair is typically very expensive. On average, an endoscope goes out of service within a thousand uses.

The present invention provides an economical mass produced design, enabling the endoscope to be disposable. The trunk, gimbals, and head are all mass-produced, for example with extruded plastic.

5 In one embodiment, the gimbals comprise a series of links interconnected by cardan joints, perforated for passage of internal tubes and cables and connected to one another by two opposed thin hinges (cardan joint), with the hinges on every other pair of disks situated at 90 degrees to the hinges of the previous disk pair. In this configuration, navigational control wires running from the handle to the head of the device can be pulled and
10 released to steer the head, the gimbals providing freedom of movement in any direction.

In an alternative embodiment, the gimbals consist of a simple convoluted tube comprising thicker inner rings alternating with thinner outer rings, wherein the outer rings provide the required freedom of movement.

15 The typical endoscope is a complex metal device comprising a housing in which each internal cable and tube running from the workstation to the head has its own casing. The need for individual casings is an added expense. A further advantage of using an extruded solid flexible tube for the trunk is that it comprises lumens for the internal cables and tubes, thereby eliminating the
20 need for casings for each individual cable and tube.

As the endoscope is inserted into the patient, it is desirable to have a means for varying the stiffness of the trunk. For example, when the trunk is starting to go through a sharp curve, it is desirable to increase stiffness (sacrificing flexibility) in order to prevent the trunk from buckling from opposing
25 forces generated by the insertion force on the one hand and the resistance on the head on the other hand.

It is therefore desirable to have a user-controlled stiffening element for the trunk. The stiffening element could be a cable pulling on the steering cables thereby compressing the trunk, additional separated cable or cables,
30 wires inserted into the trunk to directly impart stiffness, or a fluid (liquid or gas) inserted into the trunk to directly impart stiffness.

Manual insertion of the endoscope is not always the best method since it can accidentally cause internal punctures in the body. It is therefore desirable to have alternative means of driving the head. There are several possibilities, including pumping a stream of liquid against the inside of the head or mechanically imparting linear motion on the trunk, for example by rollers or other auxiliary propelling device.

Another problem associated with endoscopes is providing maximum size and number of access channels in the tube. One of the limiting factors is the geometries of the channel cross sections, particularly at the distal end of the endoscope), which are normally circular in shape. A better use of space can be achieved by varying the cross-sectional shape of these elements according to the needs of the particular application. For example, if a larger diameter tool channel is required, the cleaning water channel can be made crescent-shaped to accommodate the area needed for the tool channel. In other words, instead of just circular, the cross sectional shape of the channel can be other geometrical or any other shape – referred to herein as polymorphic.

Another problem associated with endoscopes is that the viewing lens must be kept a minimum distance from the wall of the lumen to avoid occlusion of the lens. This can be prevented by covering the lens with a cover, which may be a cap incorporated with the lens assembly or a separate cap.

Another problem associated with endoscopes is that the intensity of the light sources used for illuminating the device's viewing field and in the fluoroscope is fixed. This can be improved with the addition of an adjustable power control, such as a rheostat to the light sources.

Accordingly, several objects and advantages of preferred embodiments of the present endoscope invention are (some features are optional):

- 5
 - low cost disposable and sterile
 - mass produced from an inexpensive material
 - head, gimbals, and/or trunk are produced cheaply enough to justify making the unit disposable.
 - head, gimbals, and/or trunk are produced employing injection molding or extrusion or other manufacturing method.
- 10
 - head, gimbals, and/or trunk are connected together with simple pressure-fit connector or manufactured as one piece
 - propelled by manual insertion, liquid pressure, or drive wheel
 - user-controlled trunk stiffness (complete or partial) by tensioning steering cords, inserting reinforcing fluid, or inserting reinforcing
- 15
 - wires
 - cross-sectional shapes and areas of the channels running through the trunk and their outlets in the head are adjusted as necessary to achieve the most efficient footprint.
 - lenses are protected by a cap
- 20
 - the intensity of the light sources is user-controlled
 - CCD (or CMOS or other imaging device) is placed substantially perpendicular to or inclined with respect to the line of sight so that its side faces the head, and a mirror under the lens redirects the viewed image onto the CCD at the correct angle, thereby
- 25
 - maintaining minimum CCD footprint.
 - the drive-control handle is reusable
 - an adapter connects the endoscope to a workstation (which may be of any existing make).

BRIEF DESCRIPTION OF THE INVENTION

There is thus provided, in accordance with some preferred embodiments of the present invention, an endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting
5 into a body lumen to diagnose or treat a medical condition, the endoscope comprising:

flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein
10 at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and

a stiffening mechanism for hardening at least a portion of the body, so as to allow hardening of said at least a portion of the body during navigation of the
15 endoscope within the body lumen.

Furthermore, in accordance with some preferred embodiments of the present invention, the stiffening mechanism comprises one or more cables, connected to the head or other parts of the body, which when pulled effectively stiffen said at least a portion of the endoscope.

20 Furthermore, in accordance with some preferred embodiments of the present invention, the stiffening mechanism comprises at least one elongated insert for insertion into a cavity and provide added stiffness to said at least a portion of the endoscope.

Furthermore, in accordance with some preferred embodiments of the
25 present invention, the stiffening mechanism comprises at least one cavity for filling with a fluid.

Furthermore, in accordance with some preferred embodiments of the present invention, the fluid comprises liquid.

Furthermore, in accordance with some preferred embodiments of the present invention, the fluid comprises gas.

Furthermore, in accordance with some preferred embodiments of the present invention, the endoscope is further provided with a reservoir for
5 containing the fluid and providing it when desired.

Furthermore, in accordance with some preferred embodiments of the present invention, the cross-sections of at least some of the cavities are circular.

Furthermore, in accordance with some preferred embodiments of the present invention, the cross-sections of at least some of the cavities are
10 polygonal.

Furthermore, in accordance with some preferred embodiments of the present invention, the cross-sections of at least some of the cavities are amorphous.

Furthermore, in accordance with some preferred embodiments of the present invention, the cross-sections of at least some of the cavities are
15 characterized as lacking symmetry.

Furthermore, in accordance with some preferred embodiments of the present invention, the section with greater flexibility comprises a plurality of
20 links interconnected by cardan joints.

Furthermore, in accordance with some preferred embodiments of the present invention, the section with greater flexibility comprises a concatenated section.

Furthermore, in accordance with some preferred embodiments of the present invention, the endoscope is further provided with an auxiliary
25 propelling unit for coupling with and propelling the endoscope.

Furthermore, in accordance with some preferred embodiments of the present invention, the auxiliary propelling unit is operable manually.

Furthermore, in accordance with some preferred embodiments of the present invention, the auxiliary propelling unit is motor-operated.

Furthermore, in accordance with some preferred embodiments of the present invention, at least some of the cavities with outlets at external
5 surfaces of the distal portion facilitating exit of jets of fluid from the outlets thus providing jet propulsion to the endoscope.

Furthermore, in accordance with some preferred embodiments of the present invention, the body is made of several separate parts, that are connectable.

10 Furthermore, in accordance with some preferred embodiments of the present invention, the parts are provided with snap connectors for fast connection.

Furthermore, in accordance with some preferred embodiments of the present invention, cords are further provided, inserted through at least some
15 of the cavities, each cord connected to the head, thus enabling manipulating orientation of the head by pulling one or more cords.

Furthermore, in accordance with some preferred embodiments of the present invention, there is provided an endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into
20 a body lumen to diagnose or treat a medical condition, the endoscope comprising:

flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or
25 instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and

an orientation control mechanism for controlling the orientation of the head, comprising at least one of a plurality of cords passing through at least one of the cavities and connected to the distal portion, allowing manipulating of the orientation of the head by pulling or releasing
5 some or all of the cords.

Furthermore, in accordance with some preferred embodiments of the present invention, there is provided an endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope
10 comprising:

flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising a solid body provided with a plurality of cavities for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a
15 section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen.

Furthermore, in accordance with some preferred embodiments of the present invention, there is provided an endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into
20 a body lumen to diagnose or treat a medical condition, the endoscope comprising:

flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or
25 instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and

an auxiliary propelling device, adapted to be engaged to the flexible elongated solid body, and help in advancing and maneuvering the endoscope
30 in the body lumen.

Furthermore, in accordance with some preferred embodiments of the present invention, the auxiliary propelling device comprises a mechanical mechanism operable manually.

5 Furthermore, in accordance with some preferred embodiments of the present invention, the auxiliary propelling device comprises a motor-operated mechanical mechanism.

Furthermore, in accordance with some preferred embodiments of the present invention, there is provided an endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into
10 a body lumen to diagnose or treat a medical condition, the endoscope comprising:

flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or
15 instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen, further provided with cavities with outlets located externally on the flexible elongated solid body, so as to facilitate jets of fluid, when such fluid is pressurized into the
20 cavities, for jet propulsion of the endoscope.

Furthermore, in accordance with some preferred embodiments of the present invention, there is provided a method for manufacturing an endoscope having a flexible elongated solid body, the body having a proximal portion and a distal portion with a head, the body comprising cavities in the form of a
25 plurality of channels running through it and provided for passing to or from the head materials, data connections, power connections, or instruments, comprising manufacturing the elongated body in extrusion.

Furthermore, in accordance with some preferred embodiments of the present invention, the method further comprises manufacturing the head
30 employing casting.

BRIEF DESCRIPTION OF THE FIGURES

- Figure 1 illustrates an endoscope in accordance with a preferred embodiment of the present invention.
- 5 Figure 2A illustrates in section view, a connector component for connecting primary components of an endoscope in accordance with a preferred embodiment of the present invention.
- Figure 2B illustrates in greater detail the connector of Figure 2A.
- 10 Figure 3 illustrates in side section view the viewing components in the head of an endoscope in accordance with a preferred embodiment of the present invention.
- Figure 4 illustrates in top view the distal end of an endoscope in accordance with a preferred embodiment of the present invention.
- 15 Figure 5A illustrates in isometric view, steering controls and stiffening controls of an endoscope in accordance with a preferred embodiment of the present invention.
- Figure 5B illustrates in side section view, components for stiffening the endoscope trunk by tensioning of the steering cords in accordance with a preferred embodiment of the present invention.
- 20 Figure 6 illustrates in side section view, components for stiffening the endoscope trunk by pumping in fluids in accordance with an alternative preferred embodiment of the present invention.
- Figure 7 illustrates in side section view, components for stiffening the endoscope trunk by insertion of reinforcing cables in accordance with an alternative preferred embodiment of the present invention.
- 25 Figure 8 illustrates in side section view a fluid-propulsion mechanism for an endoscope in accordance with a preferred embodiment of the present invention.

Figure 9A illustrates in side view a mechanical propulsion mechanism for an endoscope in accordance with an alternative preferred embodiment of the present invention.

5 Figure 9B illustrates the propulsion mechanism of Figure 8A in isometric view.

Figure 10A illustrates in isometric view gimbals (with the outer shell removed) of an endoscope in accordance with a preferred embodiment of the present invention.

Figure 10B illustrates in detail the section shown in Figure 9A.

10 Figure 10C illustrates in section view, the gimbals of Figures 9A and 9C.

Figure 11 illustrates in isometric view alternative gimbals in accordance with an alternative preferred embodiment of the present invention.

Figure 12A illustrates in top section, the trunk of an endoscope in accordance with a preferred embodiment of the present invention.

15 Figure 12B illustrates the two side section views indicated in Figure 12A.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is an endoscope for working inside lumens of a patient's body. The proximal end of the endoscope is normally connected to a workstation, which can comprise various ancillary devices, such as water
20 pump, air compressor, electrical power supply etc.

Figure 1 is a general view of the endoscope 1000 of the present invention with trunk 100 having a distal end (or head) 200 and proximal end 150. The length of trunk 100 depends on the desired maximum insertion distance, typically several meters. In Figure 1, omitted portions of trunk 100
25 are indicated by a dashed curved line. Head 200 is inserted into a patient's lumen and comprises components for viewing and openings for injecting and withdrawing materials and devices. Head 200 can be steered by an operator by various means as are known in the art. In a preferred embodiment of the

present invention, steering is accomplished by retracting and releasing cables passing through trunk 100 and gimbals 700 and attached to head 200. Head 200 is mounted on gimbals 700, which enables it to be steered freely in any direction. Trunk 100 is flexible enough to follow head 200 and gimbals 700.

In a preferred embodiment of the present invention shown in Figure 1, proximal end 150 is part of a handle 400 with controls whereby an operator controls steering of and insertion/removal of head 200 into/from the patient's lumen and whereby the operator inserts and removes materials, connections, and instruments (such as a fluoroscope) to/from channels running through trunk 100 and gimbals 700 to head 200. The materials can be various states of matter (e.g., gas, liquid, solid); the connections can be various types including power supply for a viewing light or data link for receiving viewing data; the instruments can include sampling probes, fluoroscopes, therapeutic devices, and other medical instruments. It will be recognized by one skilled in the art that the user-control interface provided by handle 150 can be implemented in various ways without affecting the primary innovations of the present invention. Thus, for example, the controls could be implemented on a stationary box, rather than a handle. Handle 400 is optional.

The precise use, location, and existence of these controls and ingress points is not critical to the novelty and innovation of the current patent. They are provided for reference, and can include:

- Ingress 120 for power for navigation light source, for fluoroscope light source, and for other electrical components.
- Egress 130 for vacuuming out liquids
- Optional interface to existing workstation 150
- Ingress 160 for fluids for cleaning lens at distal end
- Conduit 180 for data connections
- Conduit 190 for inserting diagnostic and therapeutic instruments.

- Control 420 for governing stiffness of trunk 100
- Steering controls 440 and 441

In a preferred embodiment of the present invention, the power 120 for the navigation light source and/or the fluoroscope light source can be equipped with a rheostat, so that the operator can control the intensity of the light.

In a preferred embodiment of the present invention, several components of the invention are separate pieces connected 102 together. These separate pieces include handle 400, trunk 100, gimbals 700, and head 200. Alternatively, all or some of these pieces can be manufactured as a single unit.

Figure 2A and Figure 2B illustrate a connection point 102 with a connector 810 that can be used for fast, one-time connection of the pieces. Connector 810 comprises a barbed plug inserted into the adjacent ends of each piece.

One skilled in the art will realize that there are many other types of connectors that can be used to connect the parts. For example, in an alternative preferred embodiment of the present invention, the handle is reusable while the trunk, gimbals and head are disposable. In that embodiment, a reusable lock ring can be used to connect the handle to the trunk, while barbed one-time plugs connect the trunk to the gimbals and the gimbals to the head.

The present invention can be manufactured using inexpensive mass production, for example extruded plastic, in which case it can affordably used as a one-time, disposable device. Alternatively, it can be adapted to include both disposable and reusable pieces. For example, handle 400 could be reusable and connected to disposable trunk 100, gimbals 700, and head 200.

Figure 3 illustrates in side section view, the viewing components in the head 200 of an endoscope 1000 in accordance with a preferred embodiment of the present invention.

5 An innovation of the present invention is provided by protective cap 210 covers viewing lens 220, with a gap between the two. Protective cap 210 ensures that if lens 220 is pushed into contact with another object, such as the wall of the lumen, that the gap between cap 220 and lenses 210 maintains depth of field, keeping the image in focus and preventing occlusion by the object. Protective cap 210 is made of translucent, durable material, such as
10 plastic.

Another innovation of the present invention is provided by a light-bending component 230, such as a mirror or prism, which reflects images received through lens 220 at a 90 degree angle to CCD component 231, thereby enabling CCD 231 and its related electronics to be installed on its
15 side, such that CCD's 231 longest dimension lies in parallel with the body of trunk 100, thereby keeping the area of trunk 100 cross-section taken up by CCD 231 to a minimum, thereby leaving the most space possible for other components such as the channels for inserting and removing materials and instruments.

20 Figure 4 is a top view of head 200. As shown in the figure, another innovation of the present invention is to vary the cross-sectional shapes and areas of the internal channels 370 used to insert/remove materials/instruments to/from head 200 and of fluoroscope channel 350. Both these channels are shaped for most efficient use of space. For example, if
25 channel 370 were the traditional round shape, it would take up more area of the cross section, thereby limiting the cross-sectional area of channel 350 and of other channels.

The figure shows lens cap 310 (same as 210 in Figure 2A), light sources 320 (for example, light emitting diodes – LEDs), and lens cap
30 cleanser dispenser 380. In a preferred embodiment of the present invention,

light sources 320 and fluoroscope 350 are equipped with rheostats at handle 400 so that the operator can control the light intensity.

Figures 5A and 5B illustrate handle 400 in isometric and section view. In accordance with a preferred embodiment of the present invention, an operator steers head 200 by turning co-axially mounted steering controls (for example knobs) 440 and 441. Each knob is connected (via axis 460 and 450 respectively) to a pulley (461 and 460 respectively) around which loop cords 470 and 471 (respectively), which run from the respective knob, through trunk 100 and gimbals 700 to head 200. When the knob is turned it pulls one end of the cord and plays out the other end, thereby pulling head 200 back in the direction of the cord end that is being pulled. Cords 470 and 471 are at right angles to one another such that combined adjustment of controls 440 and 441 can turn head in any direction.

In a preferred embodiment of the present invention, a stiffening mechanism is provided to enable the operator to vary the stiffness of trunk 100. The reason for this is that at some junctures during insertion, for example when turning head 200 to negotiate curve in the patient's lumen, it is preferable for the trunk to be more pliant. At other junctures, such as when inserting head 200 further into the lumen, it is preferable for the trunk to be stiffer, thereby preventing it from buckling under the insertion force.

On embodiment of the stiffening mechanism is shown in Figures 5A and 5B. User control (for example, knob) 427 is attached to a pulley to which is attached one end of a cord 430 which runs through pulley 427 to steering axes 450 and 460. An operator can adjust the tension of cord 430, thereby adjusting the tension on axes 460 and 461, thereby adjusting the tension on cords 471 and 470, thereby compressing or relaxing trunk 200 and gimbals 700, to achieve greater or lesser stiffness.

A stiffening mechanism for an alternative preferred embodiment of the present invention is shown in Figure 6. Stiffening channels 480 run inside trunk 100 (see also Figure 12A). Fluid pump 470 can be operated to insert or remove fluid, thereby controlling stiffness of trunk 100.

A stiffening mechanism for another alternative preferred embodiment of the present invention is shown in Figure 7. Again, stiffening channels 480 (see also Figure 12A) run inside trunk 100. This time the stiffening agent is a wire or rod 490 rather than fluid.

5 The present invention also provides several optional mechanisms for inserting the endoscope 1000 into the patient in addition to standard automated or manual drive mechanisms.

 With reference to Figure 8, in a preferred embodiment of the present invention, the insertion mechanism comprises a channel 260 through which a
10 propelling fluid (for example, water) is pumped (illustrated by long arrow in Figure 5), through trunk 100 and gimbals 700 to propulsion plate 240. There the fluid streams out the sides through exhaust 245 (shown with small arrows in Figure 5) into the lumen, from where it is removed through exhaust channel
15 250, which is at least one of a plurality of tubes running back along on gimbals 700 and trunk 100. The force of the fluid on plate 240 drives the endoscope forward. If required, the insertion mechanism can be adapted to enable switching to removal mode, where the exhaust force is directed such that endoscope 1000 can be removed.

 With reference to Figures 8A and 8B, another insertion (and in this
20 case, also removal) mechanism 600 for an alternative preferred embodiment of the present invention features inflatable collar 640 which an operator inflates from bladder 650, to anchor endoscope 1000 in an orifice leading to the patient's lumen. For example, in the case of a gastro-intestinal exam, collar 640 would anchor endoscope 1000 in the patient's anus. Once
25 endoscope 1000 is anchored, the operator operates a mechanism that applies linear motion control (for example, a roller) 610 moving trunk 100. In the roller implementation shown, opposition is provided by opposition rollers 630. Depending on the direction of rotation of motion mechanism 610, trunk 100 is either inserted into, or retracted from, the patient.

30 Figures 10A, 10B, and 10C illustrate a gimbals 700 for an endoscope in accordance with a preferred embodiment of the present invention.

Gimbels 700 comprises pairs of disks 702 that enable head 200 to pivot in any direction. Each disk 702 has internal spaces for the passage of materials, instruments, power and data, etc. In addition, each disk 702 has holes 710 spaced evenly around its perimeter (for example, at angles of 0, 90, 180 and 270 degrees from center). Each pair of opposing holes provides passage for the two sides of a steering cord 470 or 471. The cords terminate at the distal end of the device and are used to steer the device as was described earlier. Disks 702 are "hinged" to each other at two points 720. The members of the hinge pair are located opposite one another on the disk, each at the point where a hole 710 passes. The bridge pair on one face of a disk is oriented at 90 degrees to the bridge pair on the other face of the disk.

Operation of steering works as follows. When a steering cord 470 or 471 is retracted by control 440 or 441, it passes back through its series of holes, pulling back on head 200. The series of hinges 720 located along the path of the retracted cord act as blocks, preventing the adjoining disks from compressing, however the other series of hinges 720 (oriented at 90 degrees to the cord) function as hinges, allowing the adjoining disks to compress together, thereby causing gimbals 700 to turn in the direction of the retracted cord, thereby turning head 200.

Another gimbals 700 mechanism is provided in an alternative preferred embodiment of the present invention, as shown in Figure 11. In this arrangement, simple ridged ("convoluted") plastic tubing is used, the tubing comprising thinner-walled inner rings alternating with thicker-walled outer rings. When the string is retracted, the thinner inner rings compress along the string's path, thereby turning head 200.

The composition of trunk 100 is now described with reference to Figure 12A, which is a top section view, and Figure 12B, which comprises the two side section views indicated in Figure 12A. Trunk 100 comprises a solid core 110 encompassing channels of various cross-sectional shapes running its length. The channels are intrinsic parts of core 110 and are created as part of the manufacturing process.

The use of the channels depends on the particular application. In most cases, the channels will be used as follows:

tensioning channels 480

steering cord channel 104

5 video link channel 105

instrument ("working") channel 106

fluid evacuation channel 107

Trunk core 110 is encompassed in mesh 108, which prevents torsion of trunk 100. Mesh 108 is covered with sheath 109, which creates a smooth
10 surface for reduced friction and protects mesh 108.

It should be clear that the description of the embodiments and attached Figures set forth in this specification serves only for a better understanding of the invention, without limiting its scope as covered by the following Claims.

It should also be clear that a person in the art, after reading the present
15 specification could make adjustments or amendments to the attached Figures and above described embodiments that would still be covered by the following Claims.

CLAIMS

1. An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope comprising:
 - 5 flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and
 - 10 a stiffening mechanism for hardening at least a portion of the body, so as to allow hardening of said at least a portion of the body during navigation of the endoscope within the body lumen.
- 15 2. The endoscope of claim 1, wherein the stiffening mechanism comprises one or more cables, connected to the head or other parts of the body, which when pulled effectively stiffen said at least a portion of the endoscope.
- 20 3. The endoscope of claim 1, wherein the stiffening mechanism comprises at least one elongated insert for insertion into a cavity and provide added stiffness to said at least a portion of the endoscope.
- 25 4. The endoscope of claim 1, wherein the stiffening mechanism comprises at least one cavity for filling with a fluid.
5. The endoscope of claim 4, wherein the fluid comprises liquid.
6. The endoscope of claim 4, wherein the fluid comprises gas.

7. The endoscope of claim 4, further provided with a reservoir for containing the fluid and providing it when desired.
8. The endoscope of claim 1, wherein the cross-sections of at least some of the cavities are circular.
- 5 9. The endoscope of claim 1, wherein the cross-sections of at least some of the cavities are polygonal.
10. The endoscope of claim 1, wherein the cross-sections of at least some of the cavities are amorphous.
- 10 11. The endoscope of claim 1, wherein the cross-sections of at least some of the cavities are characterized as lacking symmetry.
12. The endoscope of claim 1, wherein the section with greater flexibility comprises a plurality of links interconnected by cardan joints.
- 15 13. The endoscope of claim 1, wherein the section with greater flexibility comprises a concatenated section.
14. The endoscope of claim 1, further provided with an auxiliary propelling unit for coupling with and propelling the endoscope.
15. The endoscope of claim 14, wherein the auxiliary propelling unit is operable manually.
- 20 16. The endoscope of claim 14, wherein the auxiliary propelling unit is motor-operated.
- 25 17. The endoscope of claim 1, wherein at least some of the cavities with outlets at external surfaces of the distal portion facilitating exit of jets of fluid from the outlets thus providing jet propulsion to the endoscope.
18. The endoscope of claim 1, wherein the body is made of several separate parts, that are connectable.

19. The endoscope of claim 18, wherein the parts are provided with snap connectors for fast connection.

5 20. The endoscope of claim 1, wherein cords are further provided, inserted through at least some of the cavities, each cord connected to the head, thus enabling manipulating orientation of the head by pulling one or more cords.

21. An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope comprising:

10 flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other

15 portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and

an orientation control mechanism for controlling the orientation of the head, comprising at least one of a plurality of cords passing through at least one of the cavities and connected to the distal

20 portion, allowing manipulating of the orientation of the head by pulling or releasing some or all of the cords.

22. An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to

25 diagnose or treat a medical condition, the endoscope comprising:

5 flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising a solid body provided with a plurality of cavities for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen.

10 23. An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope comprising:

15 flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen; and

20 an auxiliary propelling device, adapted to be engaged to the flexible elongated solid body, and help in advancing and maneuvering the endoscope in the body lumen.

24. The endoscope of claim 23, wherein the auxiliary propelling device comprises a mechanical mechanism operable manually.

25 25. The endoscope of claim 23, wherein the auxiliary propelling device comprises a motor-operated mechanical mechanism.

26. An endoscope for use in connection and combination with controls and a workstation, the endoscope for inserting into a body lumen to diagnose or treat a medical condition, the endoscope comprising:

27. flexible elongated solid body having a proximal portion and a distal portion with a head, the body comprising cavities provided for passing to or from the head materials, data connections, power connections, or instruments, wherein at the distal portion of the body there is a section with greater flexibility than other portions of the body, for enabling an operator to steer the head along twists and convolutions in the lumen,
- 5 further provided with cavities with outlets located externally on the flexible elongated solid body, so as to facilitate jets of fluid, when such fluid is pressurized into the cavities, for jet propulsion of the endoscope.
- 10
28. A method for manufacturing an endoscope having a flexible elongated solid body, the body having a proximal portion and a distal portion with a head, the body comprising cavities in the form of a plurality of channels running through it and provided for passing to or from the head materials, data connections, power connections, or instruments, comprising manufacturing the elongated body in extrusion.
- 15
29. The method of claim 28, further comprising manufacturing the head employing casting.
- 20

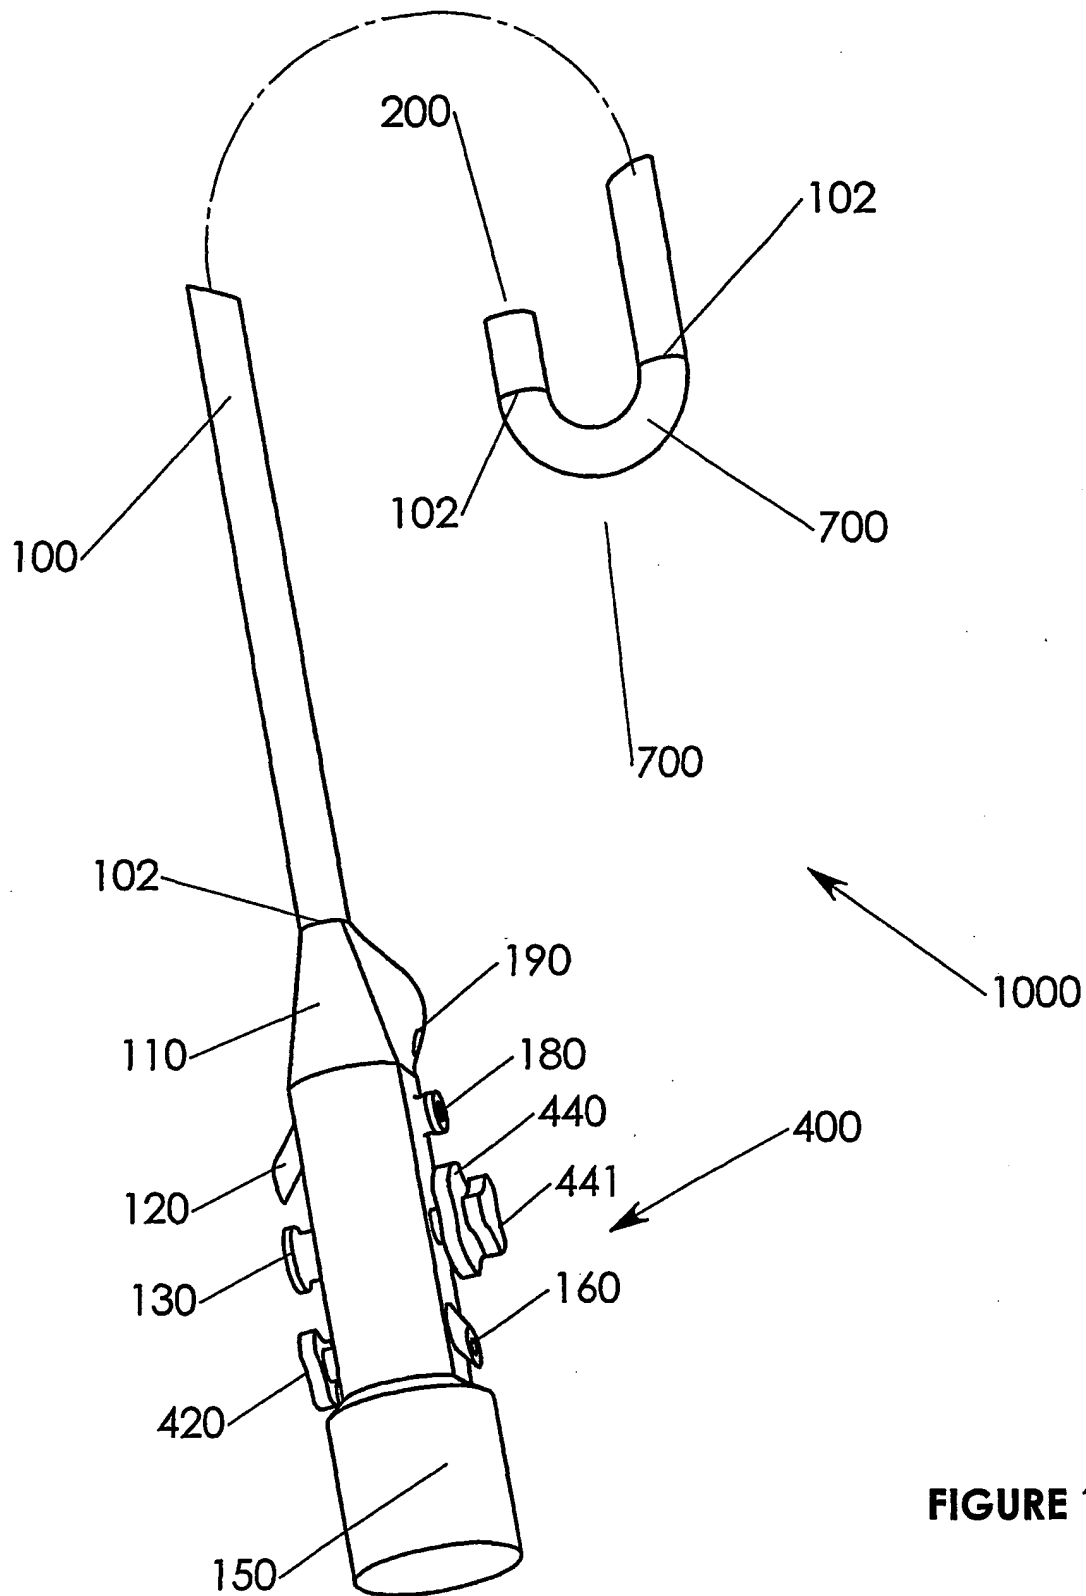


FIGURE 1


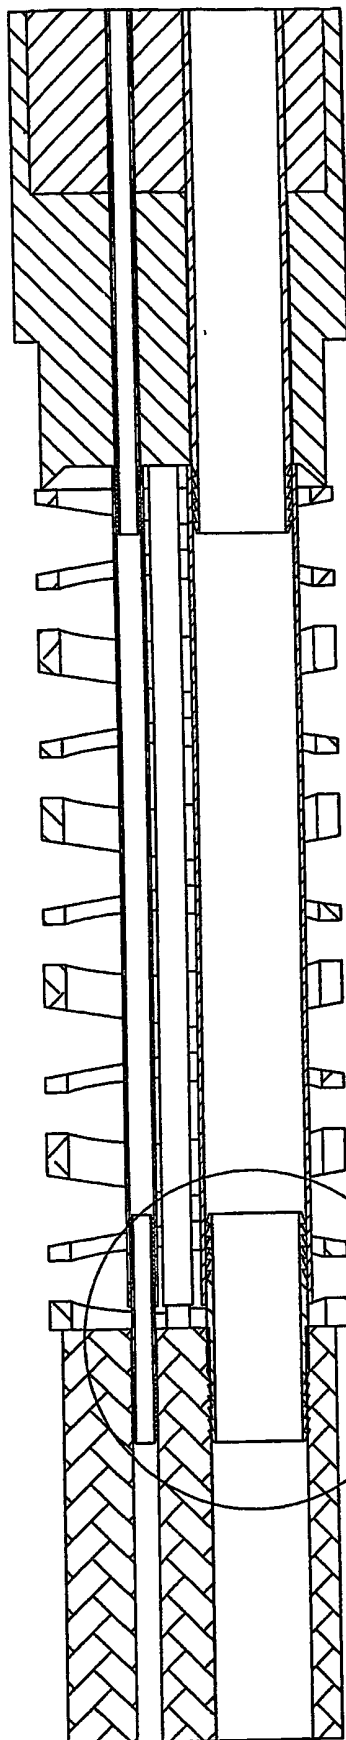


FIGURE 2A

102

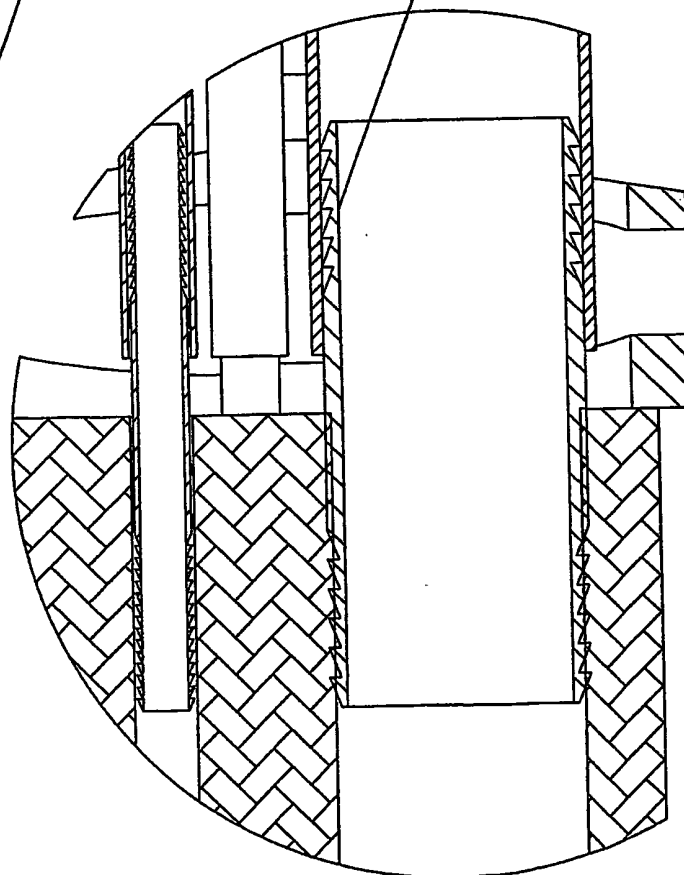

810

FIGURE 2B

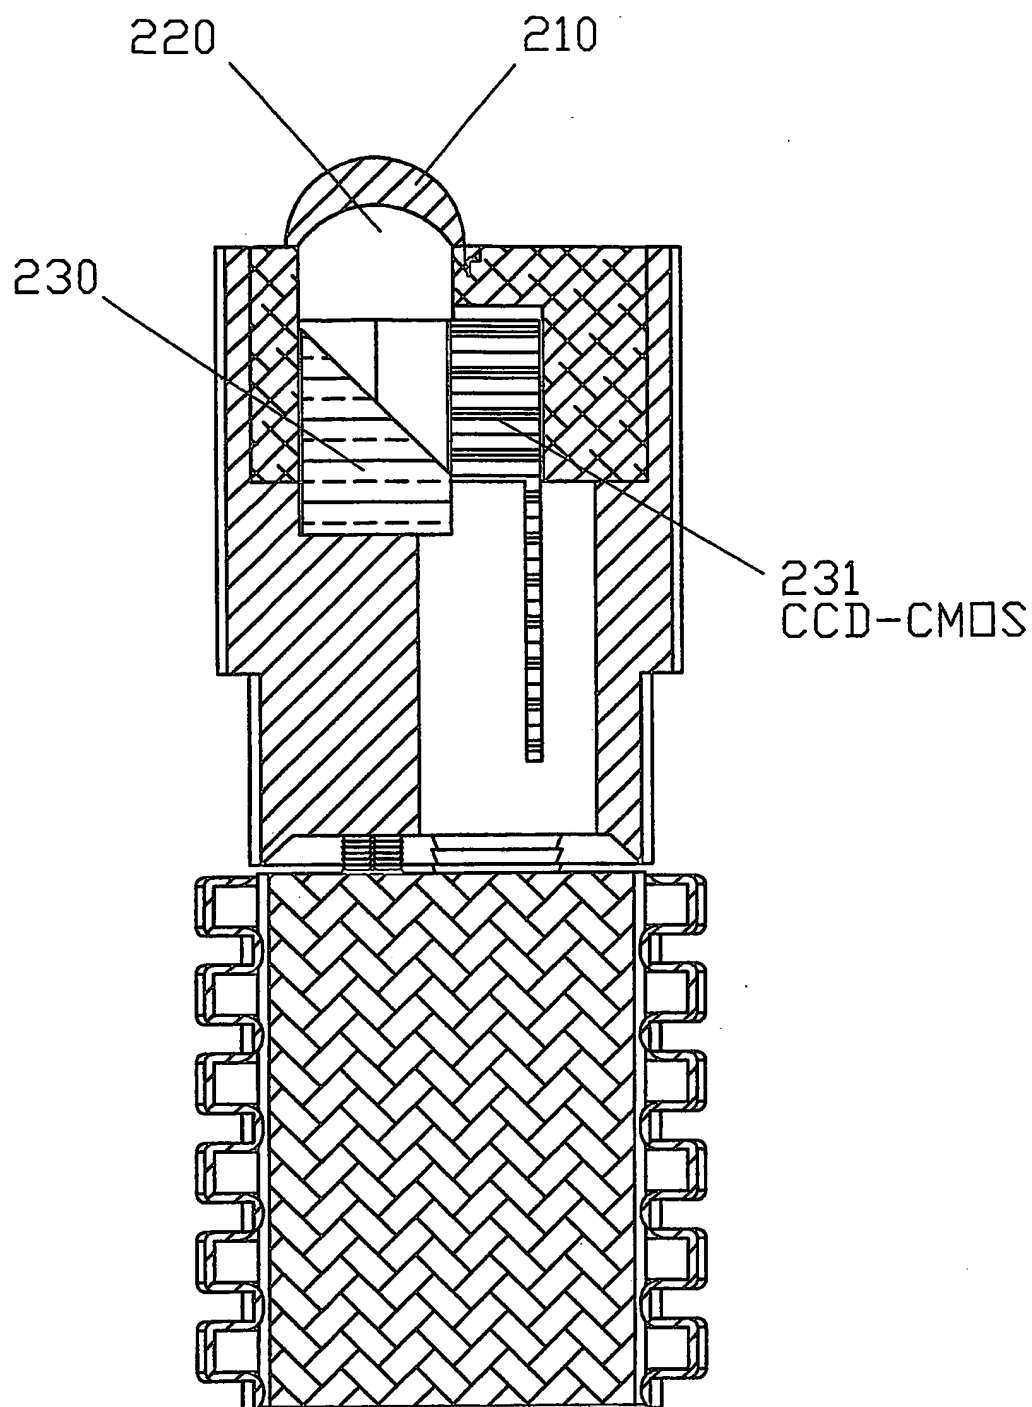


FIGURE 3

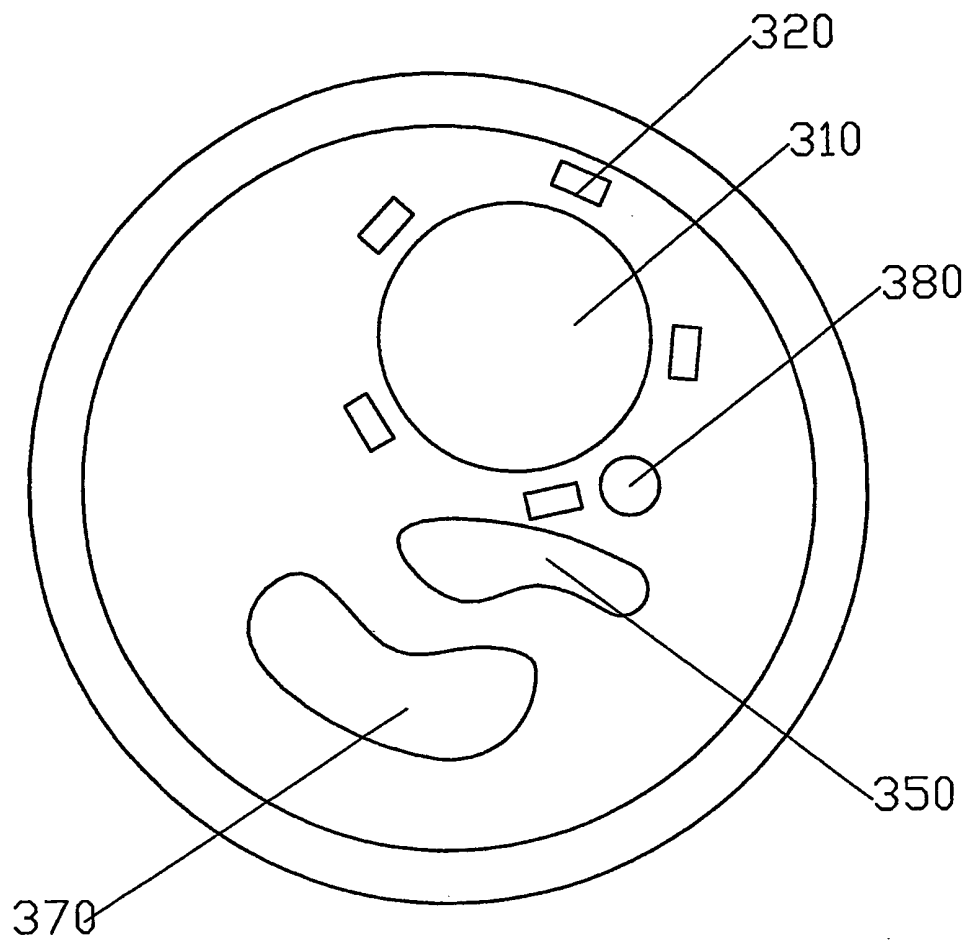


FIGURE 4

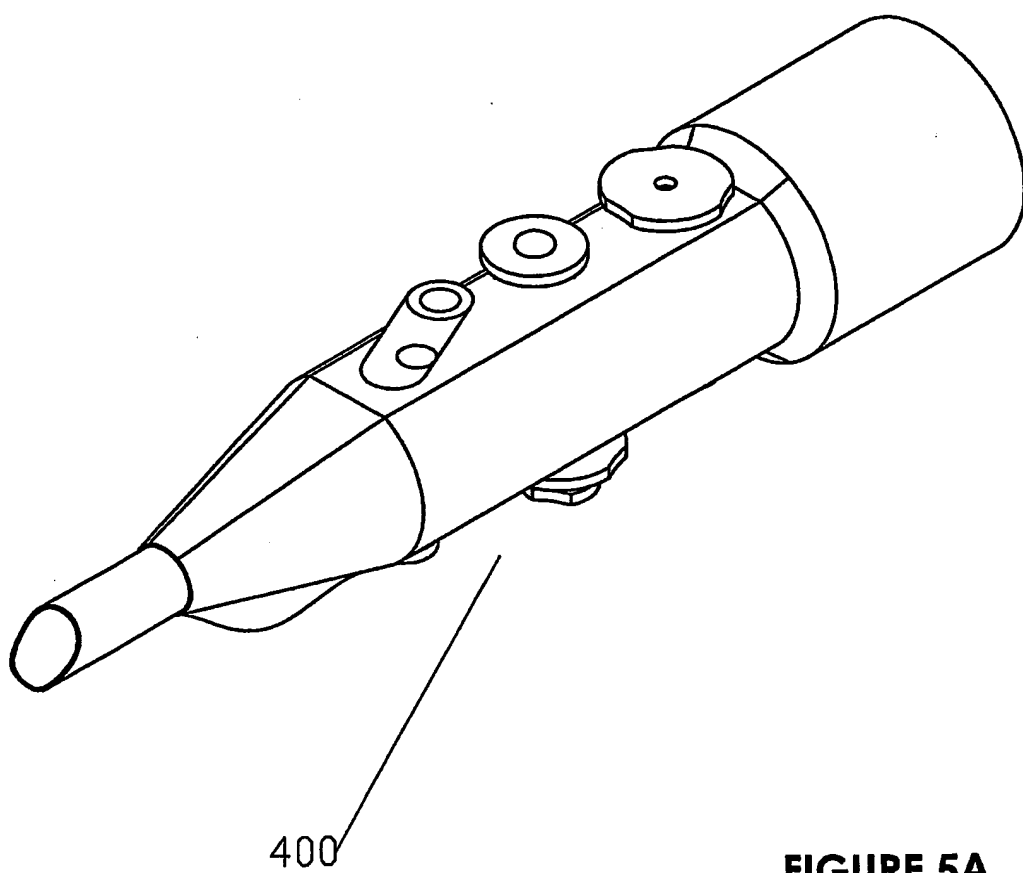
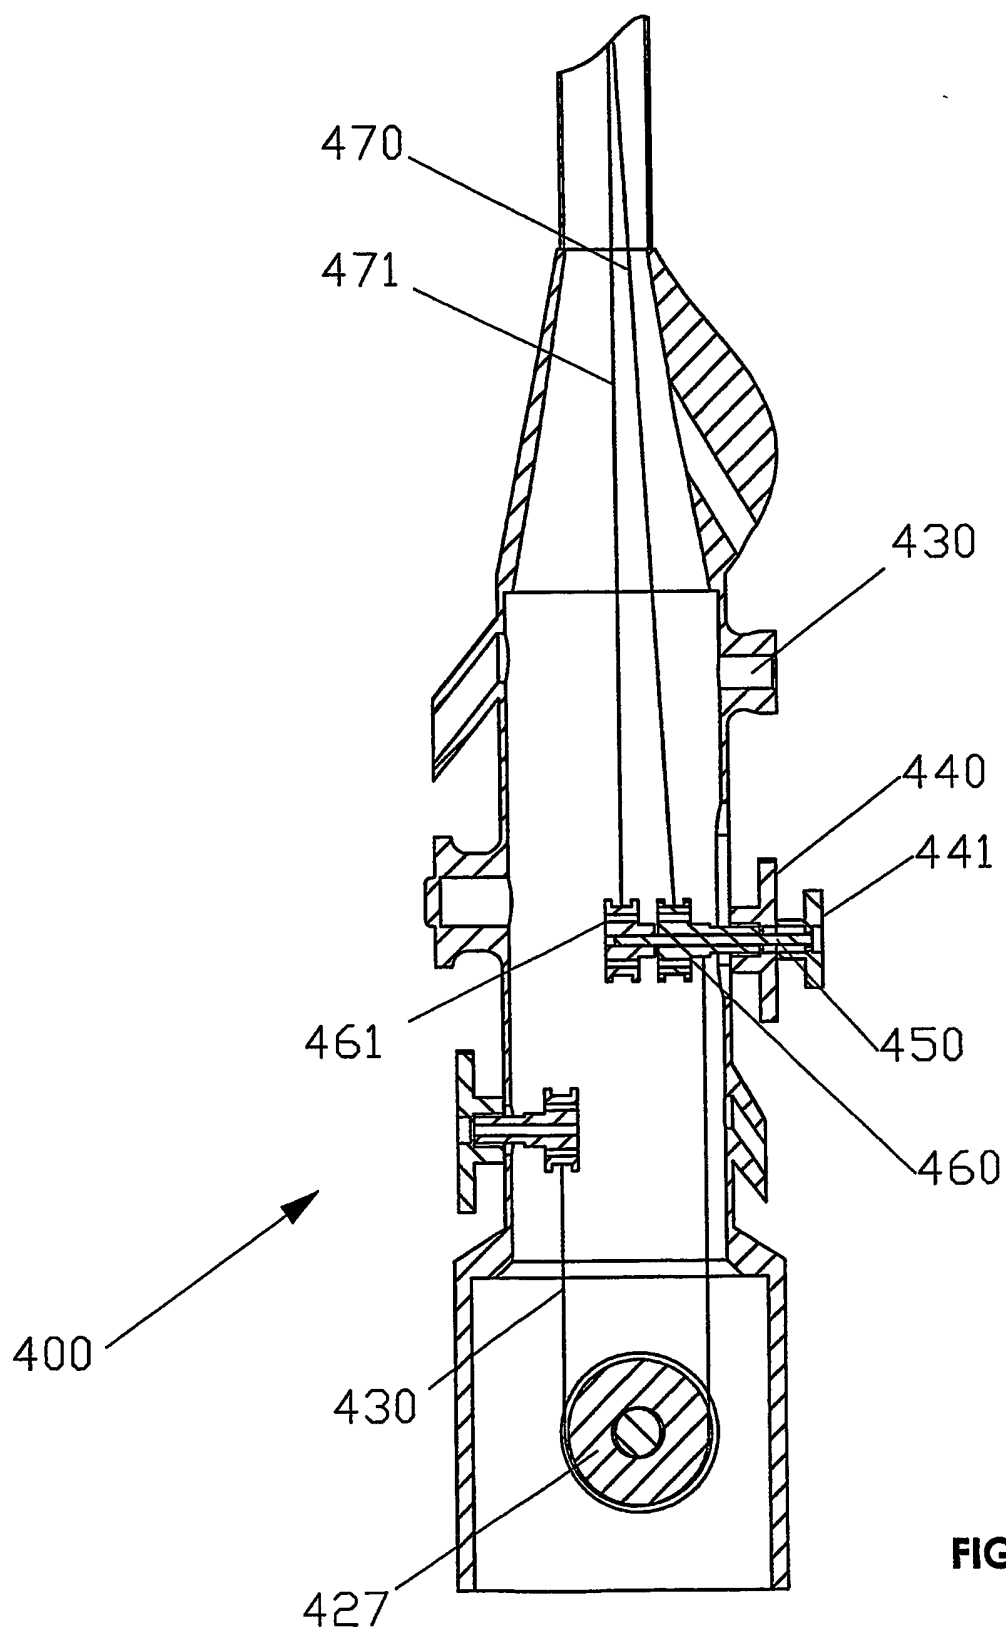
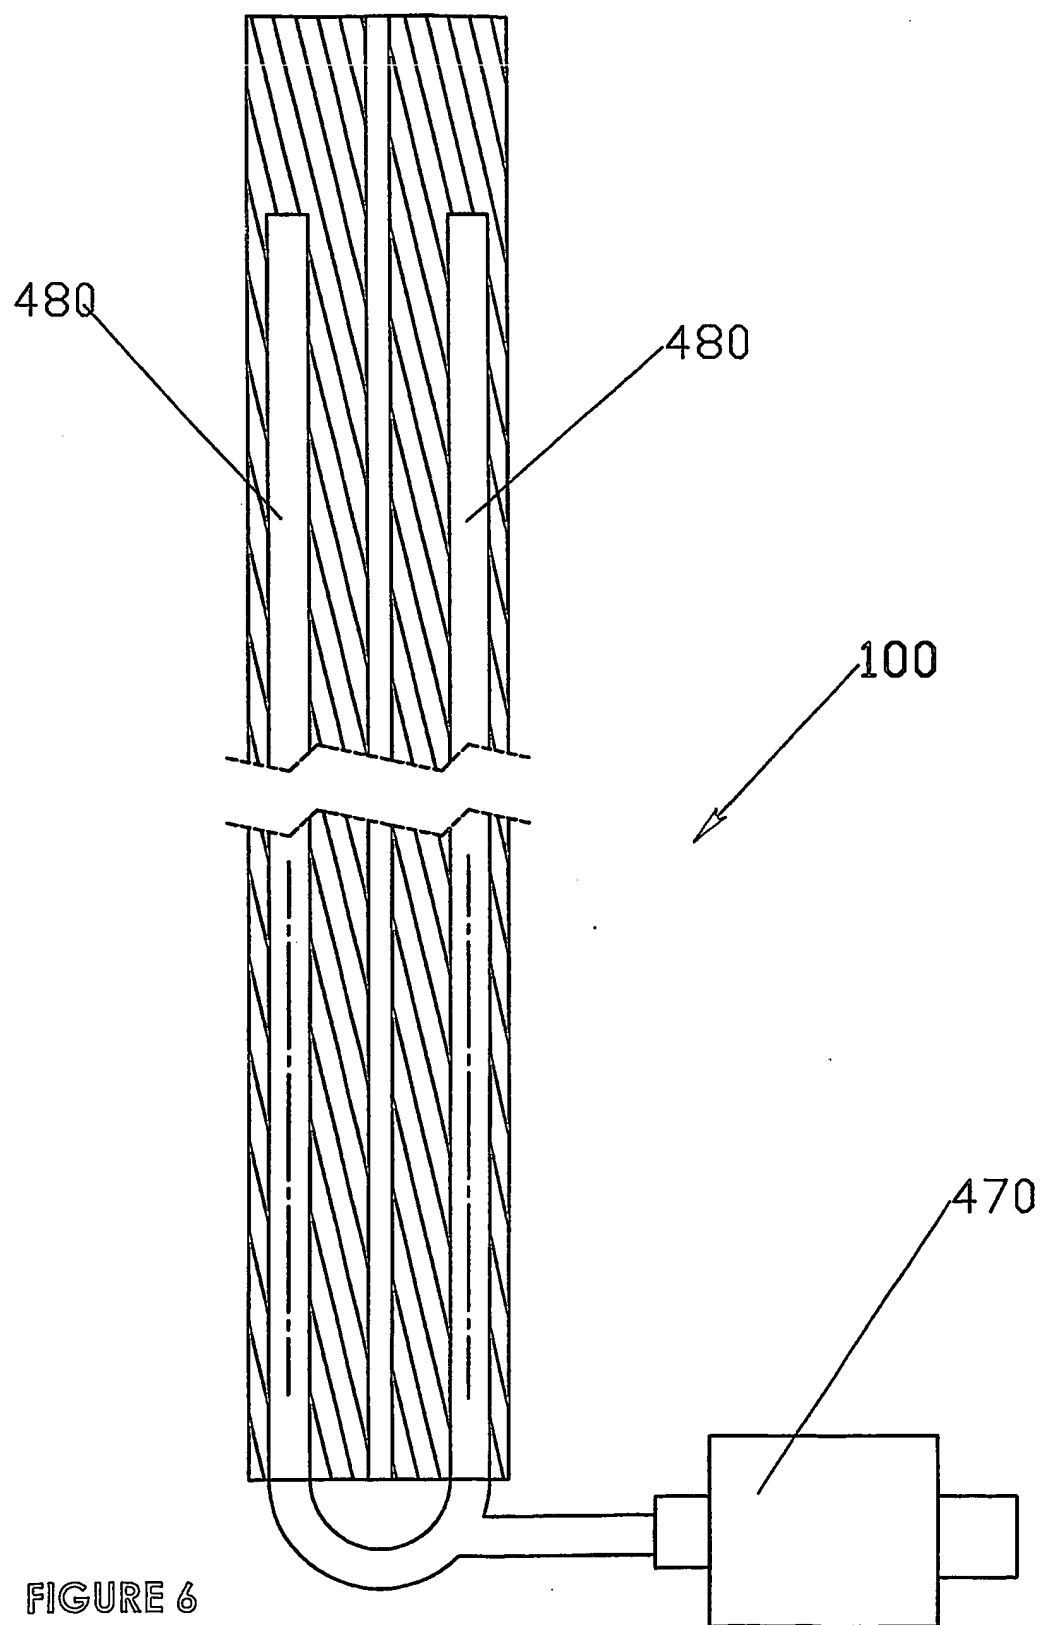


FIGURE 5A

**FIGURE 5B**



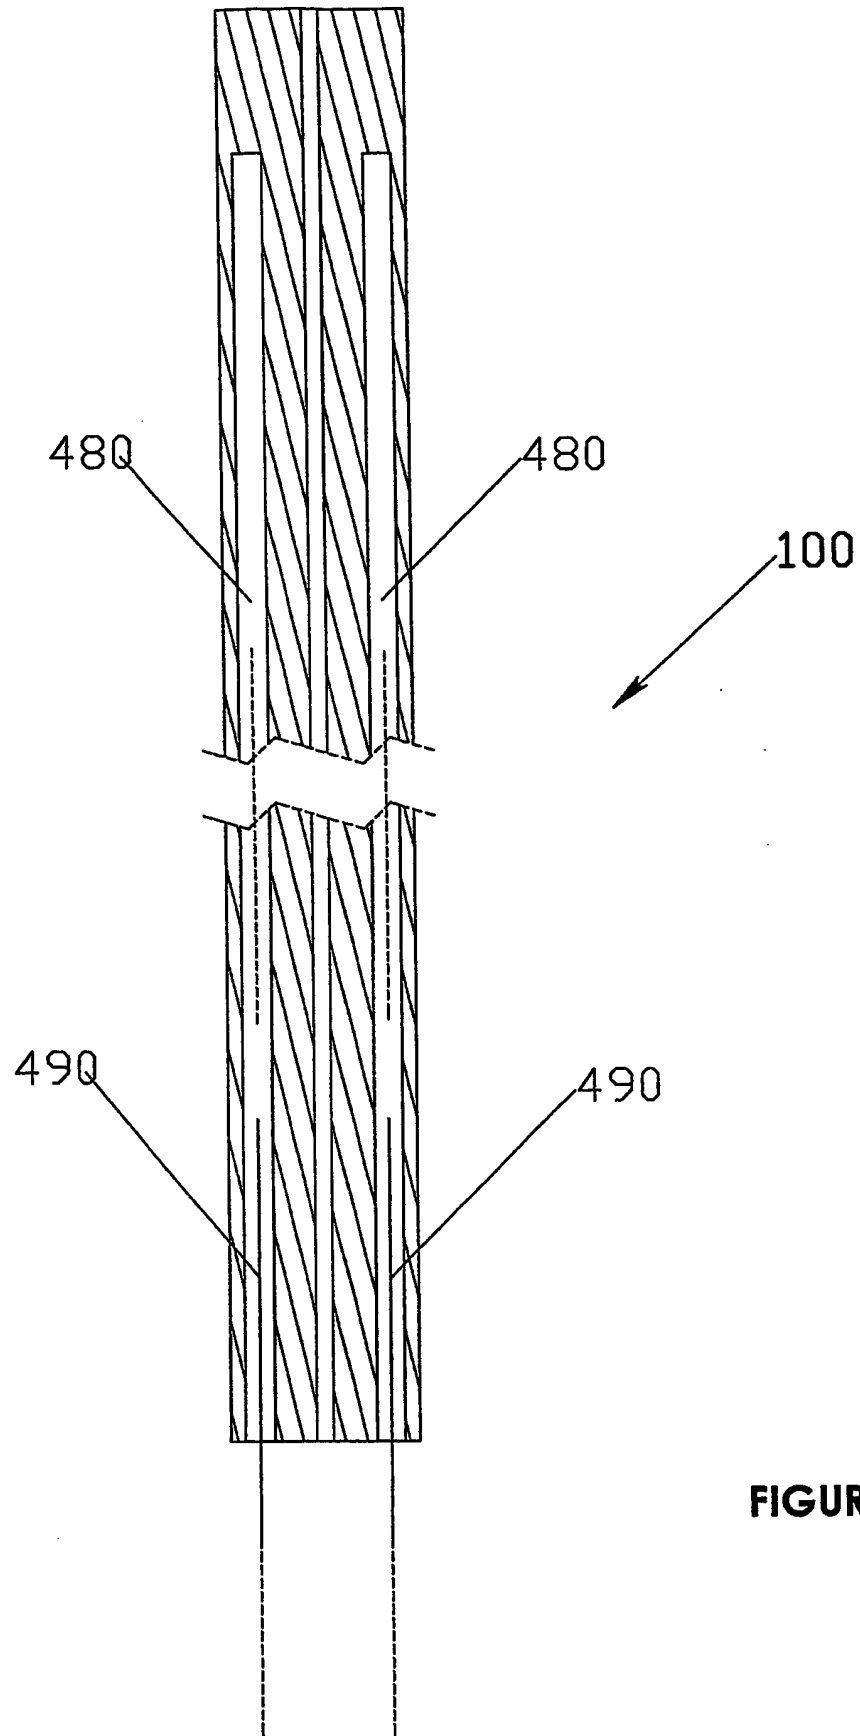
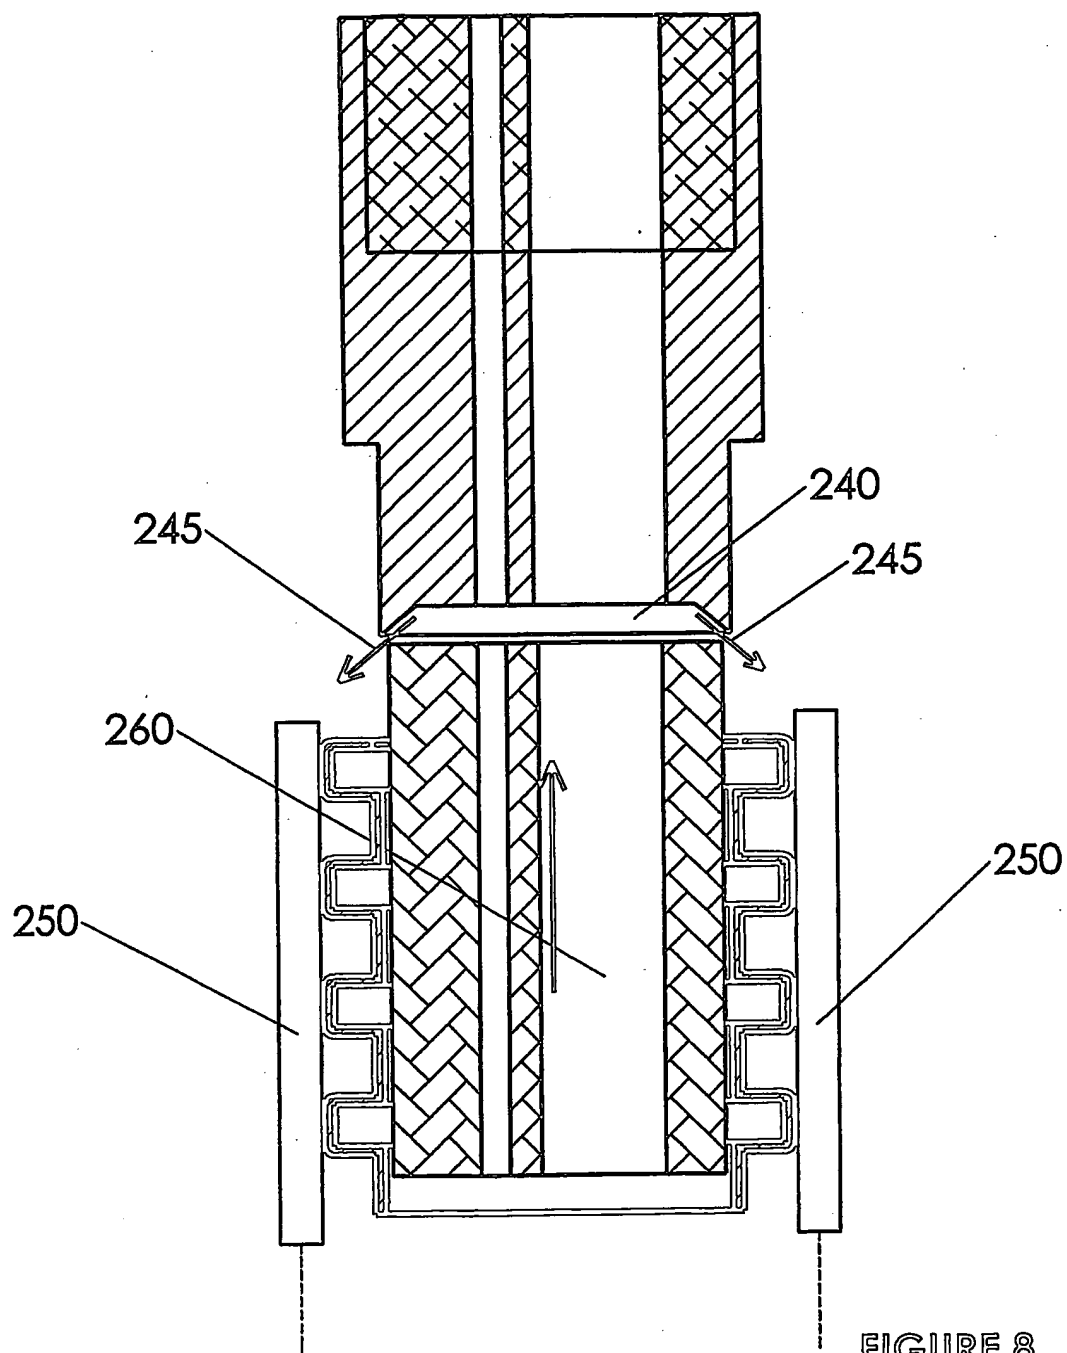


FIGURE 7



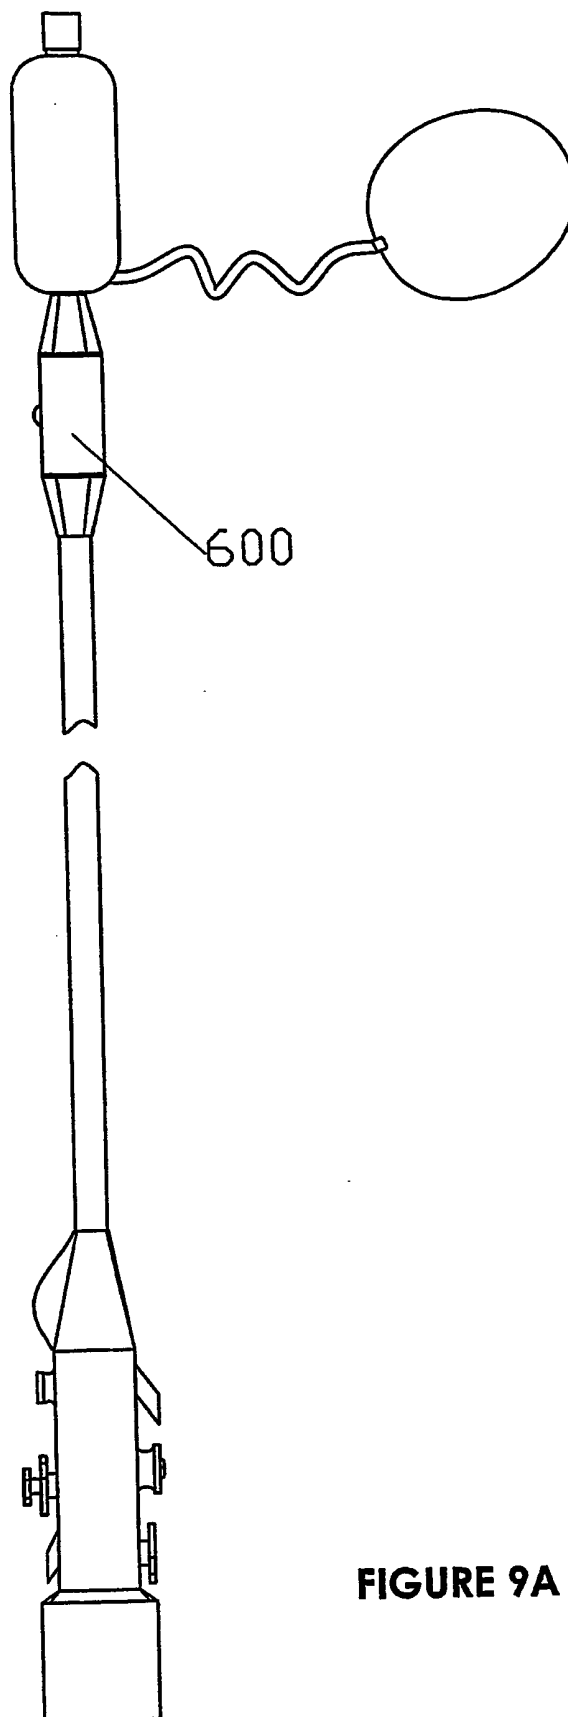


FIGURE 9A

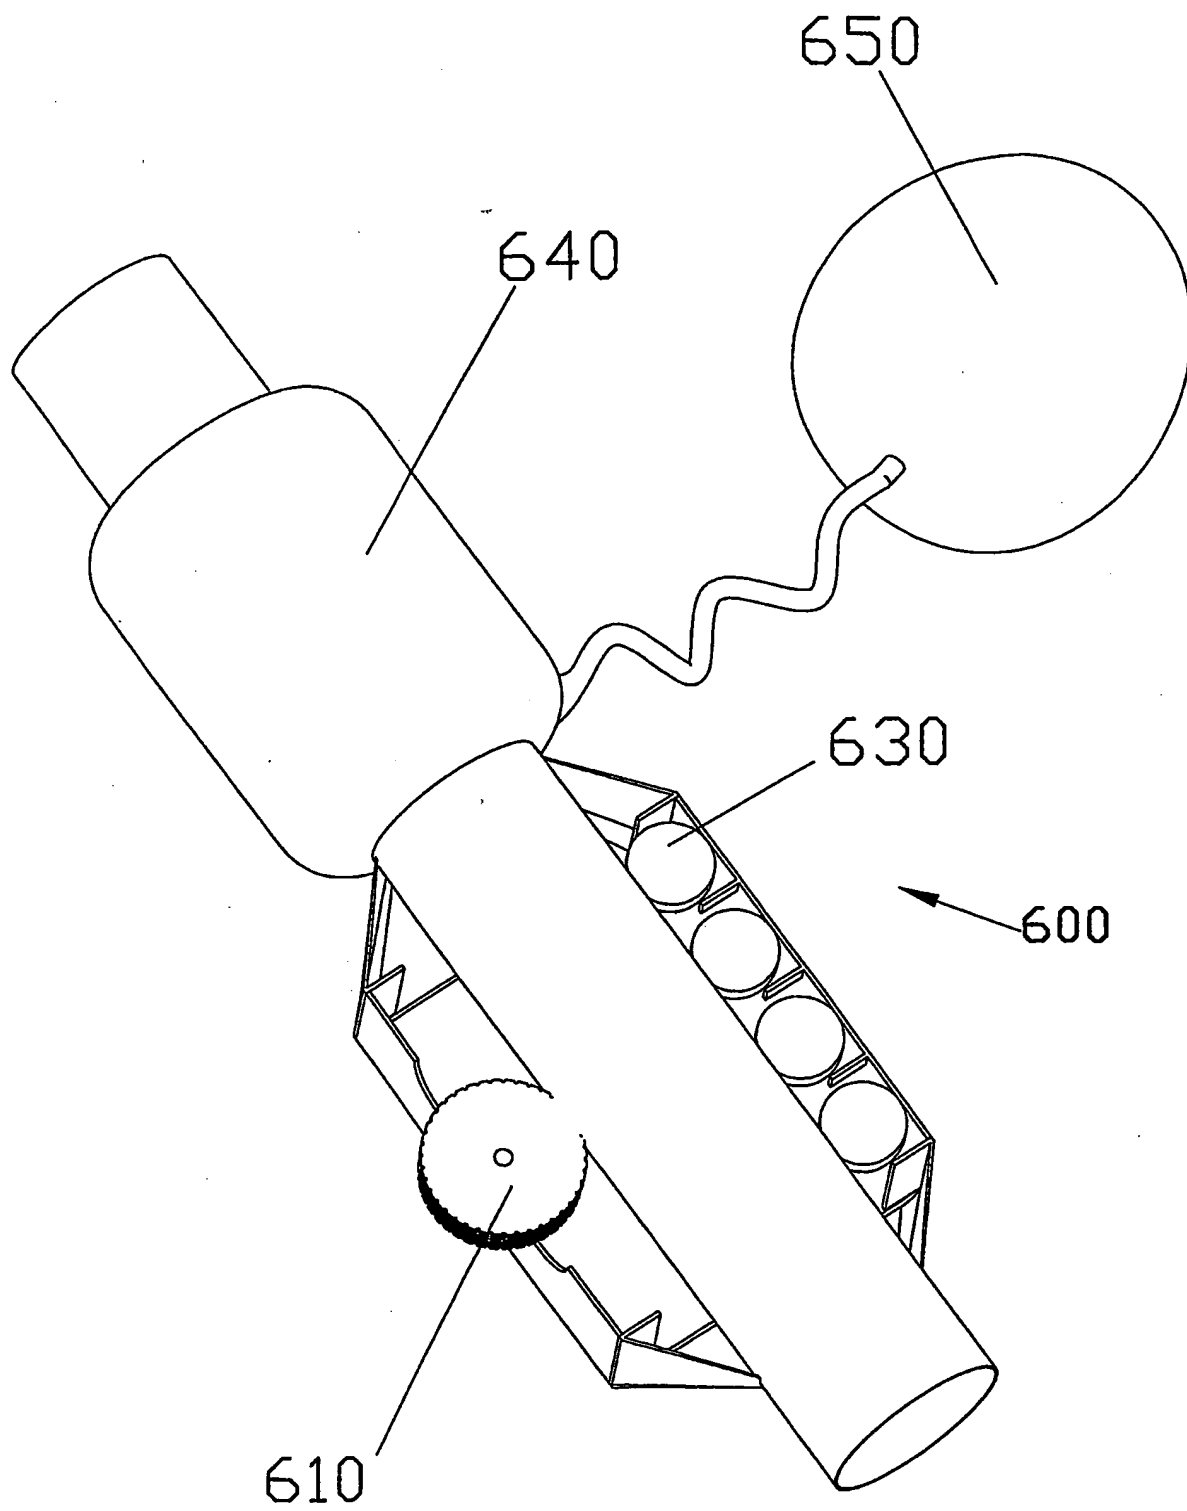


FIGURE 9B

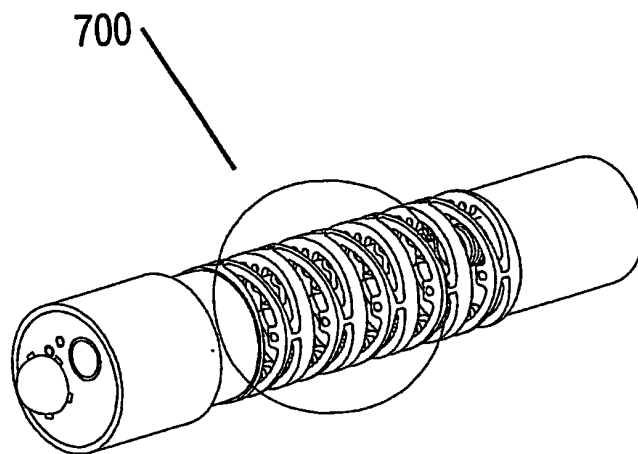


FIGURE 10A

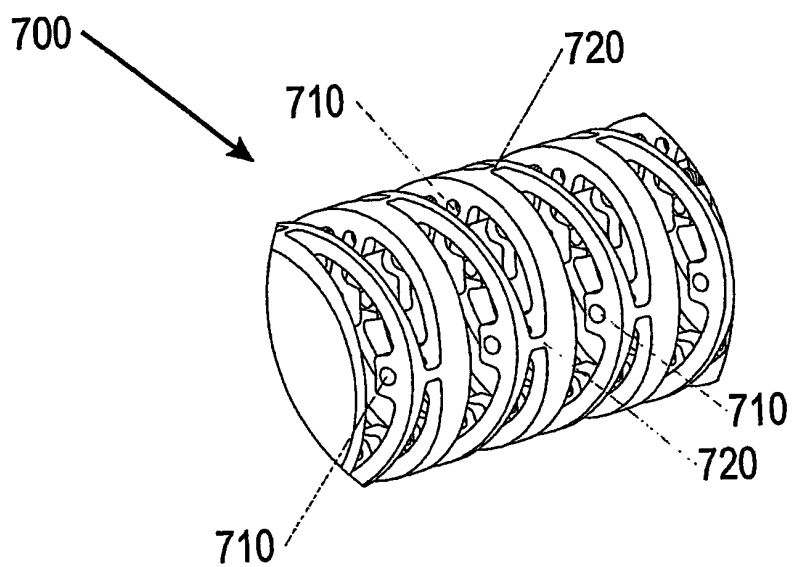


FIGURE 10B

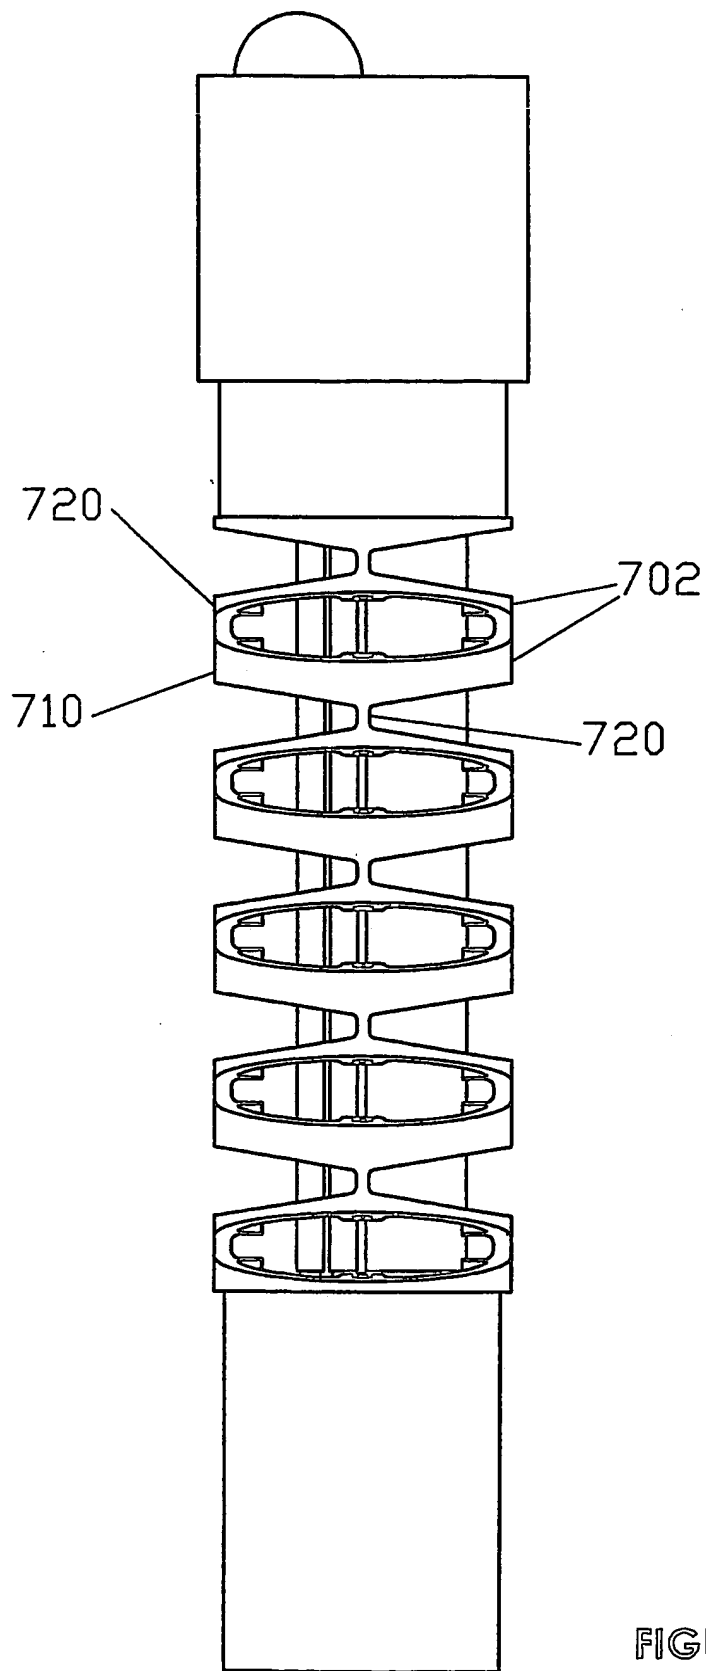


FIGURE 10C

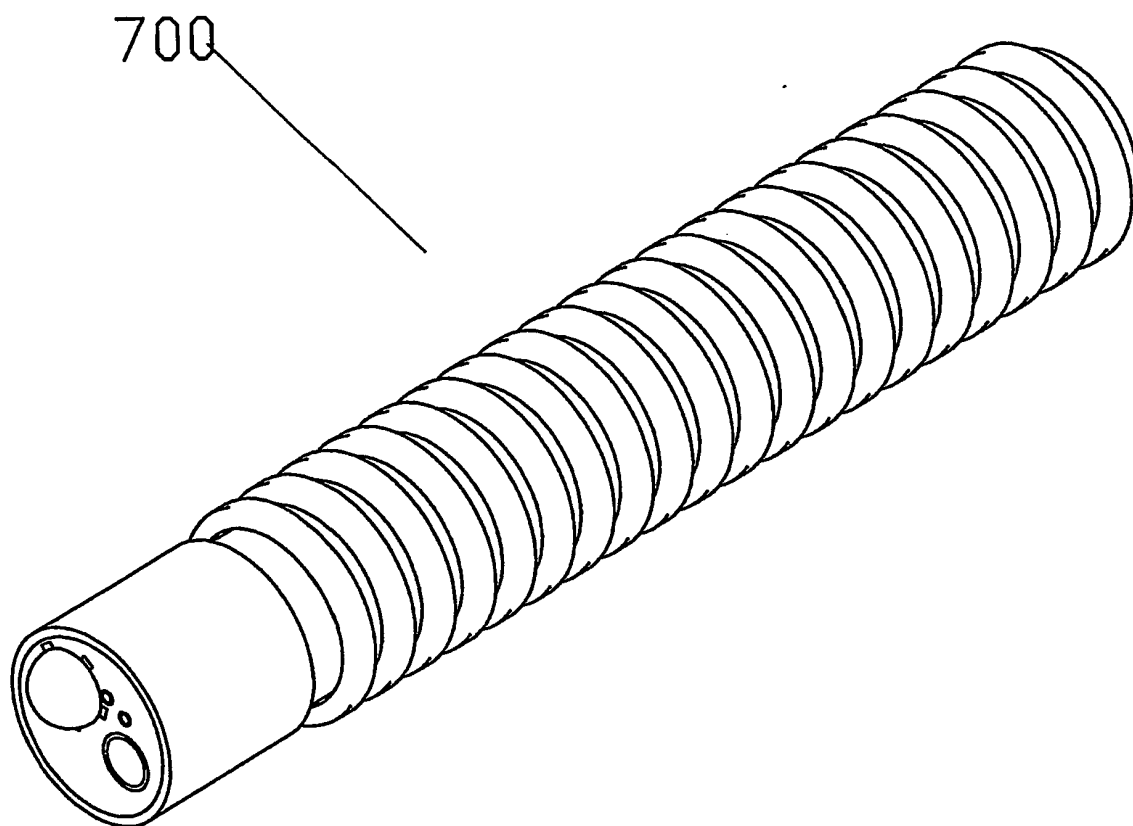


FIGURE 11


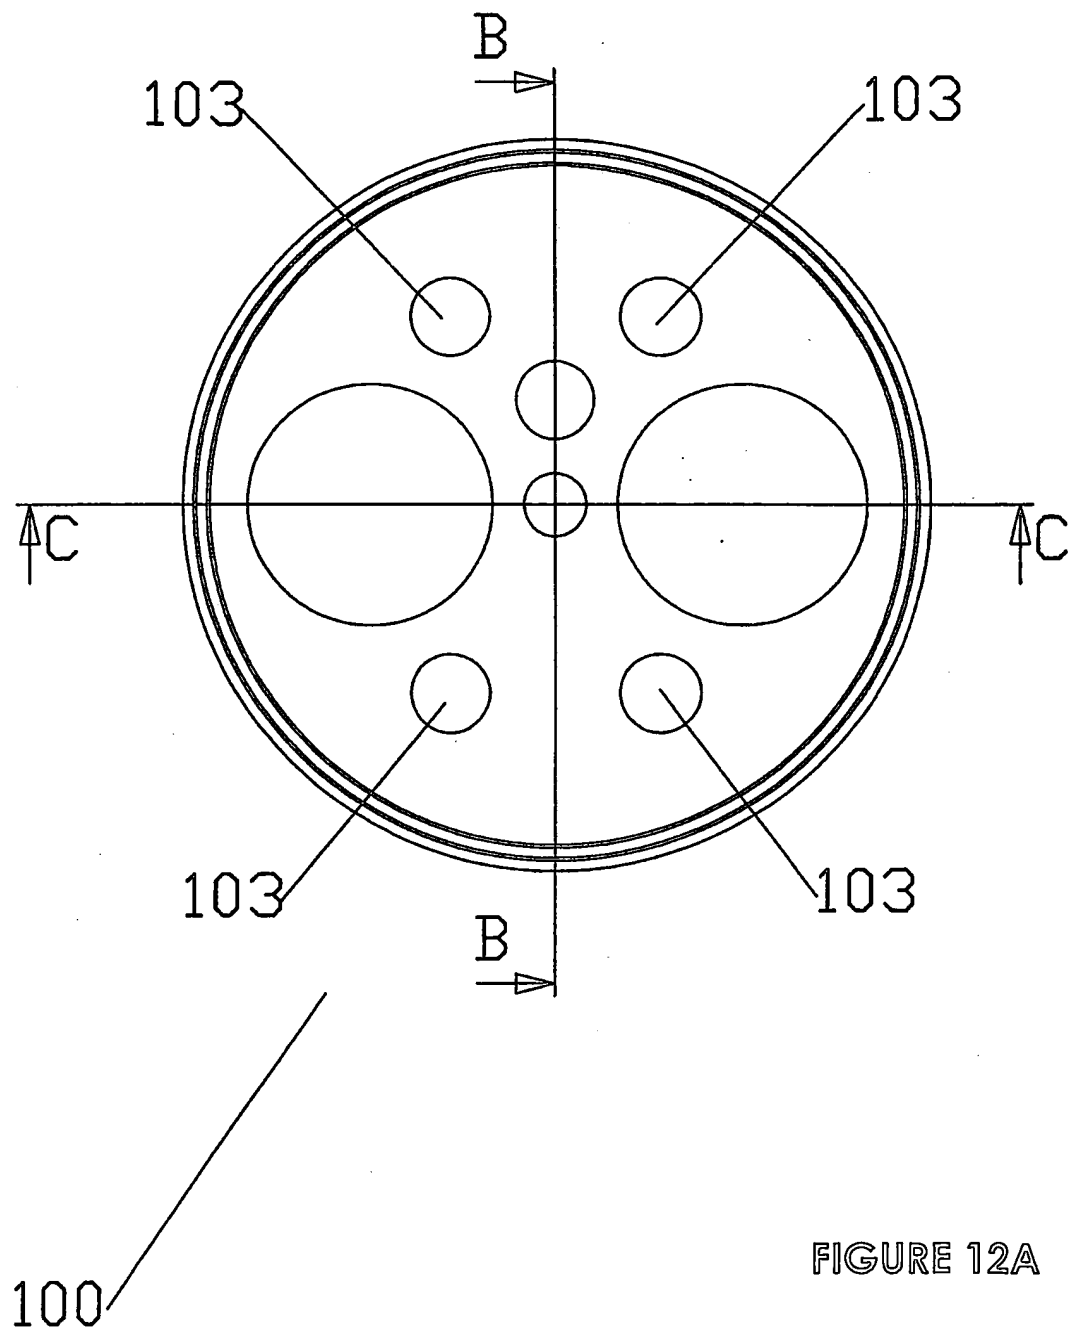


FIGURE 12A

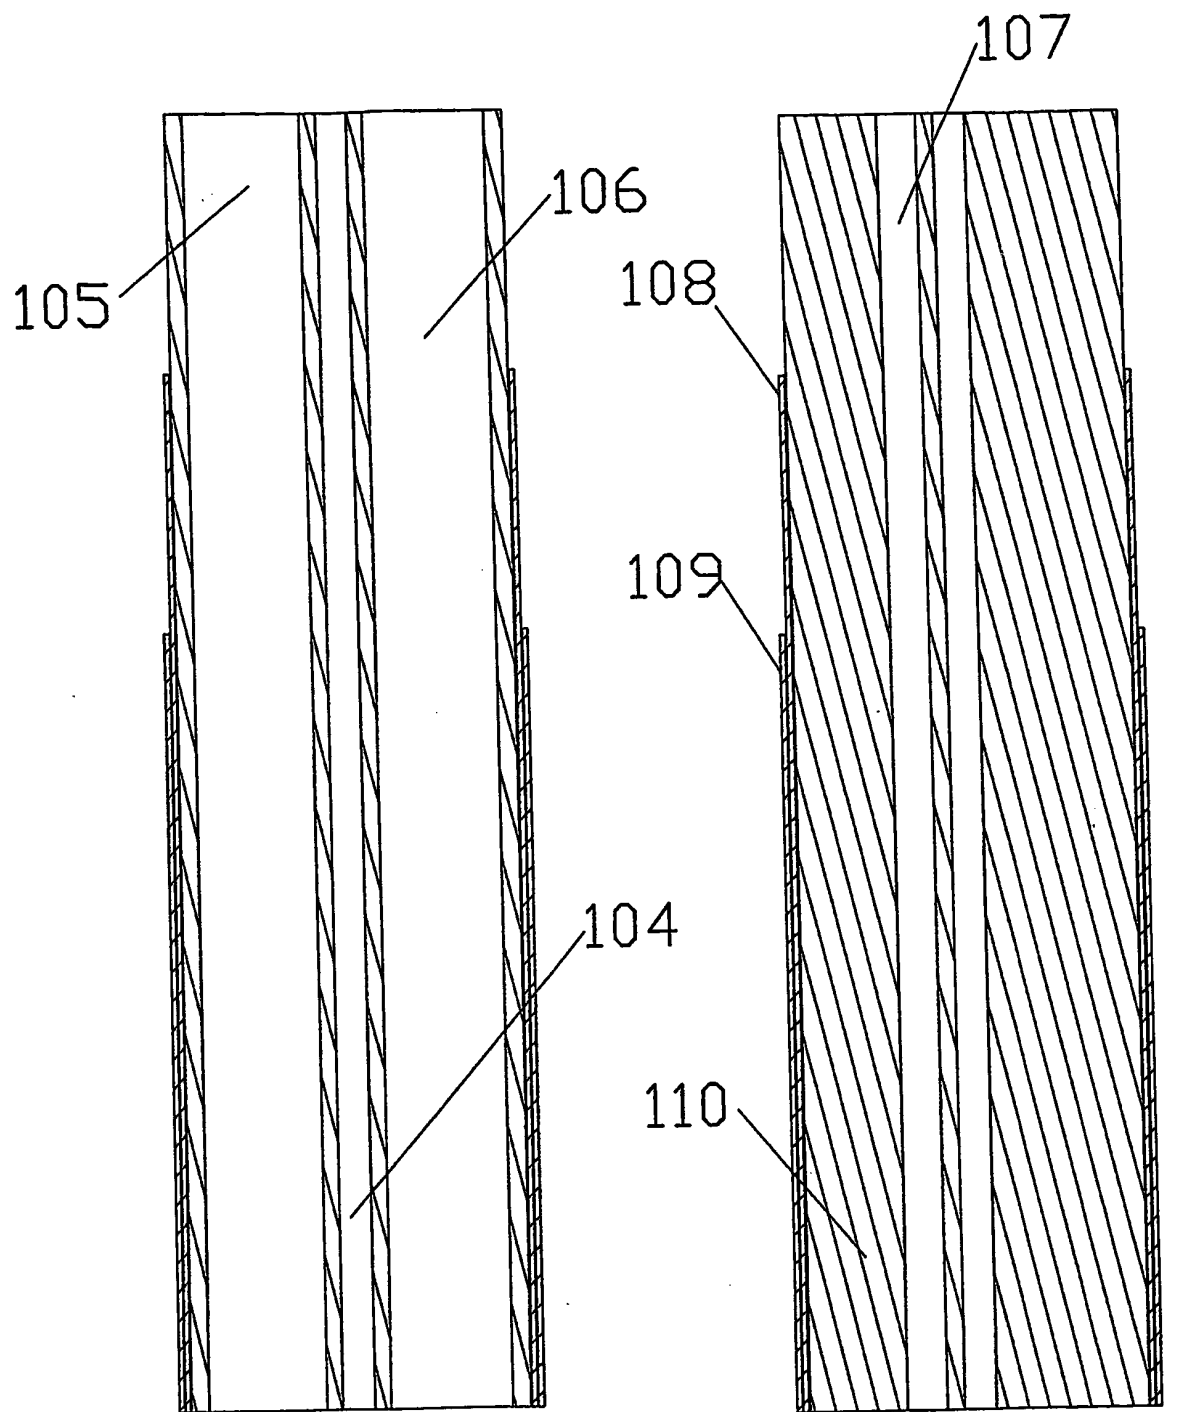

SECTION C-C

SECTION B-B

FIGURE 12B

This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)